



EC6073

Input Module



- Sealed EMI/RFI shielded aluminum box
- Dual input
- DC supply from battery modules
- Insert calibration
- BNC Output Connector

EC6073

The EC6073 Input Module is equipped with two input connectors that provides connection for RESON hydrophones terminated with either Jupiter or LEMO connectors.

A four-pole connector required for TC4014 connectors can be optionally supplied on request.

The EC6073 distributes and terminates the hydrophone cable connections to DC supply, signal output and insert calibration.

TECHNICAL SPECIFICATIONS

EC6073 Connections:

TL4032 connection JUPITER M 10 7 polereceptacle

TC4014 connection. Not standard, 4 poleinsert is available on request.

TC4035 connection LEMO 4 polereceptacle.

Signal output on BNC connector.

Insert Voltage Calibration on BNC connector

DC-supply to hydrophones on 3 pole connector

Weight: 0.55kg


Dimensions: L.w.h. 125 x 80 x 60mm

Accessories included: Supply cable TL8088

Insert voltage calibration of hydrophones can be performed by connecting CAL. (BNC connector) to a Sine-generator and the hydro- phone output from OUT connector to scope or voltmeter measures the response.

DC voltage supply to the hydrophone preamplifiers can be supplied either from the portable Battery Modules EC6068 or EC6069 or from the EC6072 battery charger if mains are available. The TL8084 cable is used for DC supply connections.




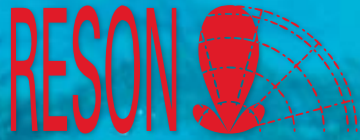


EC6073

Input Module


Outline dimensions and layout

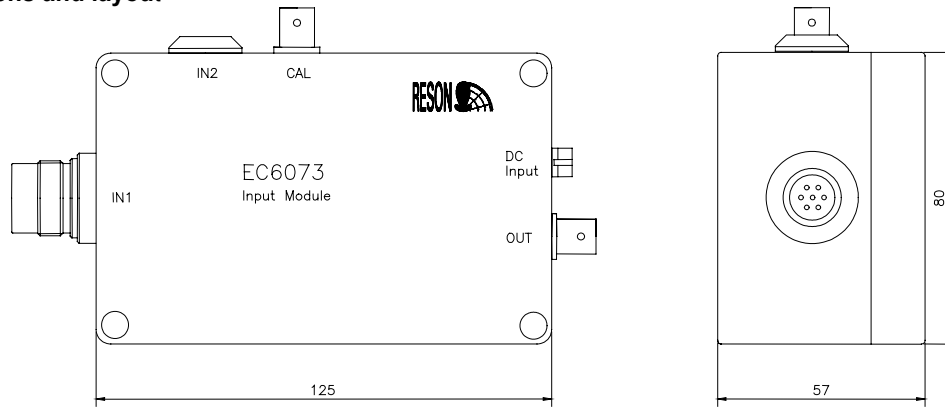

Circuit Diagram

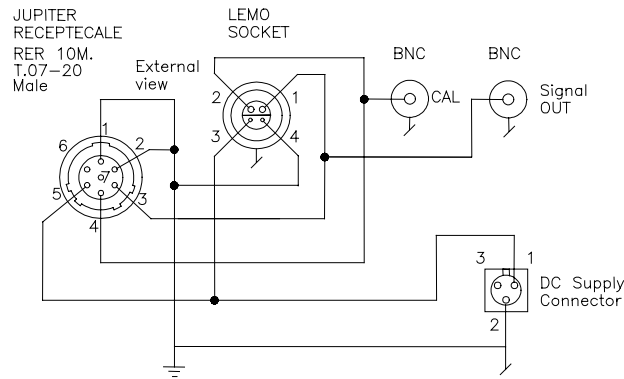

TL 8088 Supply Cable

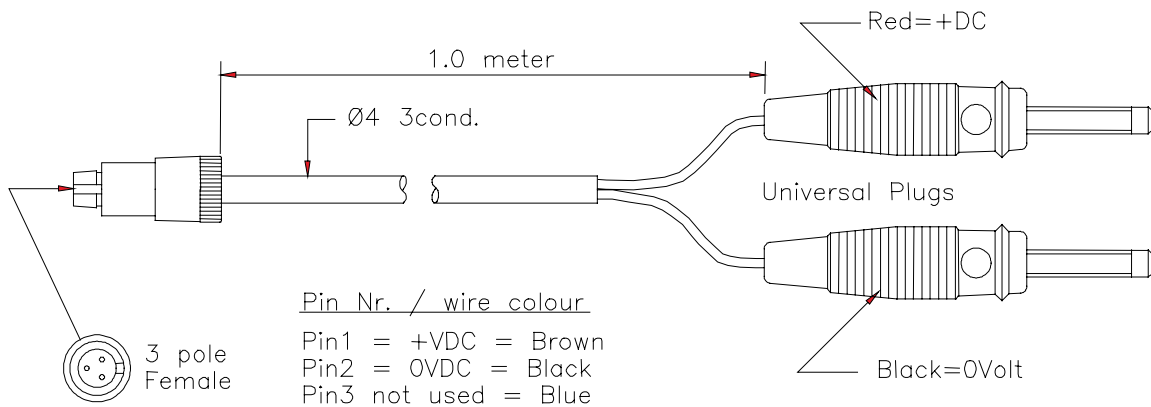

RESON reserves the right to change specifications without notice. © 2006 RESON A/S
For Acoustical Measurement Accuracy please refer to www.reson.com or contact sales.

RESON A/S
Denmark
Tel: +45 4738 0022
E-mail: reson@reson.dk

RESON Inc.
USA
Tel: +1 805 964-6260
E-mail: sales@reson.com

RESON Offshore Ltd.
United Kingdom
Tel: +44 1224 709 900
E-mail: sales@reson.co.uk

RESON GmbH
Germany
Tel: +49 431 720 7180
E-mail: reson@reson-gmbh.de

RESON B.V.
The Netherlands
Tel: +31 (0)10 245 1500
E-mail: info@reson.nl

RESON Mediterranean SRL
Italy
Tel: +39-051-572-643
E-mail: info@reson.it