




ELECTRICAL WIRING DIAGRAM

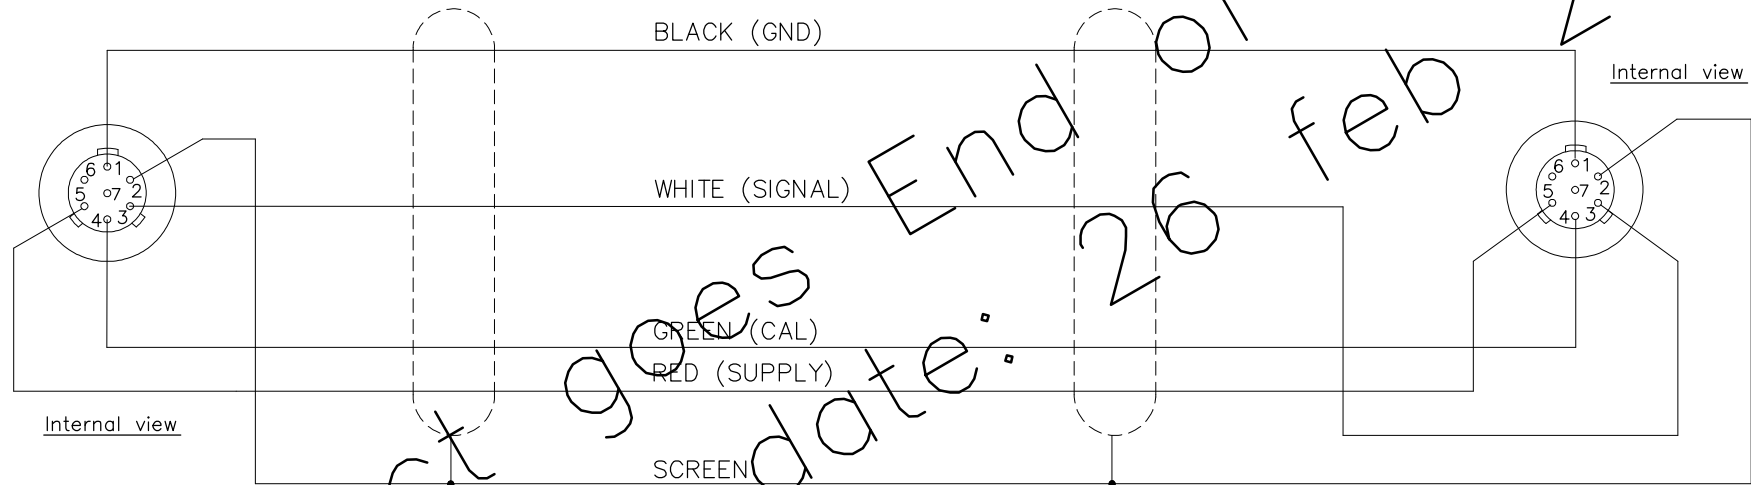

External view



External view

NB! the cables type TL8091 and TL8086 are fully compatible and may be used for termination of TC4032 or TC4042 (single ended output). The kevlar reinforced TL8091 enable safe free suspended operation of hydrophones down to 4042 pressure limits.

Product goes End of Life
Last order date: 26 feb 2010

		Scale:	Material:		Title: TL8091 "Kevlar" reinforced cable for hydrophone type TC4032 and 4042 with single output.
Unless otherwise stated the below applies					
Tol. for linear dim.: DS/ISO 2768-1m		Thread tolerances: (DS/ISO 965-1) 6H/6g		RESON A/S Fabriksvangen 13 DK-3550 Slangerup	Dwg. no. / Rev. no.: 8091M011_002
Surface roughness: (DS/ISO 58&468) Ra ✓		Break corners: Internal radii:			
Prepared	Designed	QA		Tel.: +45 47 38 00 22 Fax: +45 47 38 00 66	
04-04-01 GH					