



Transducer TC1026

High Power Communications Transducer



TC1026


- 36 kHz compact
- High efficient ceramic
- Easy to install
- Long life time

The TC1026 is a high power communication transducer for long/short base line measurement, pinger/transponder systems, acoustic telemetry systems and telephone systems.

TECHNICAL SPECIFICATIONS

Resonant frequency:	36kHz \pm 2kHz (34-38kHz)
Transmitting sensitivity:	137dB \pm 3dB at 36kHz (re μ Pa/V at 1m)
Receiving sensitivity:	-193dB \pm 3dB at 36kHz (re 1V/ μ Pa)
Impedance:	630ohm \pm 10% 81° phase \pm 10% at 36kHz
Vertical directivity pattern:	Typically \pm 35° from horizontal plane
Horizontal directivity pattern:	Omnidirectional
Max input power: (1% duty cycle)	100W
Operating depth:	6000m
Survival depth:	6000m
Operating temperature range:	-2° to +30°C
Storage temperature range:	-30° to +70°C
Cable (Optional)	Two single wires
Housing:	Special formulated NBR
Weight (air) incl. cable:	0.5kg




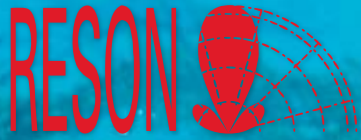


Transducer TC1026

High Power Communications Transducer


Vertical Directivity Pattern

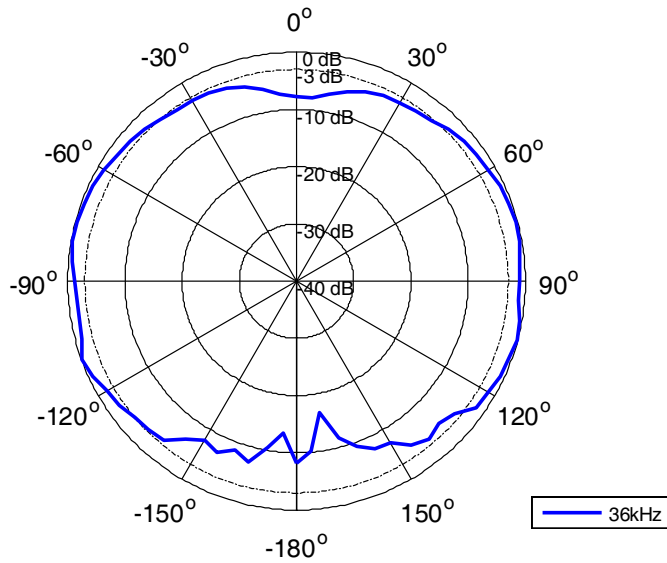


Receiving Sensitivity [dB re 1V/μPa @ 1m]

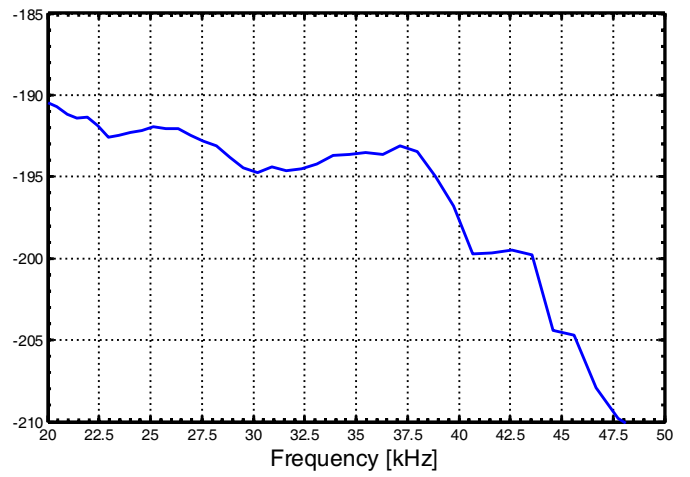

Transmitting Sensitivity [dB re 1μPa/V @ 1m]

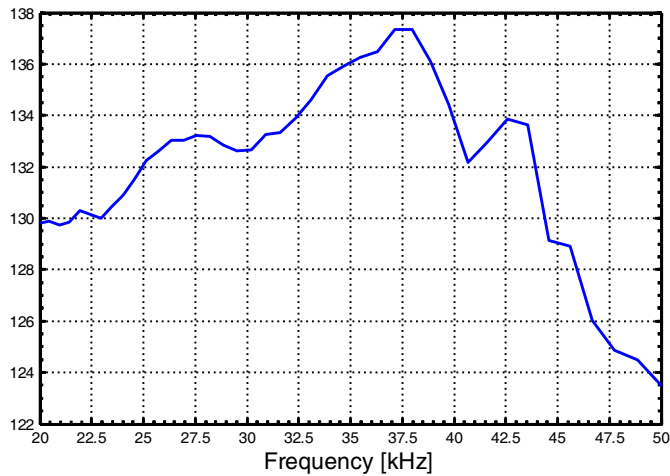

Impedance

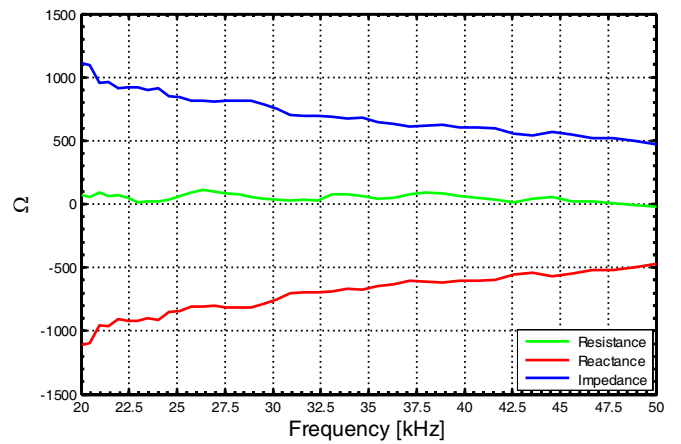




Transducer TC1026

High Power Communications Transducer

Outline Dimensions

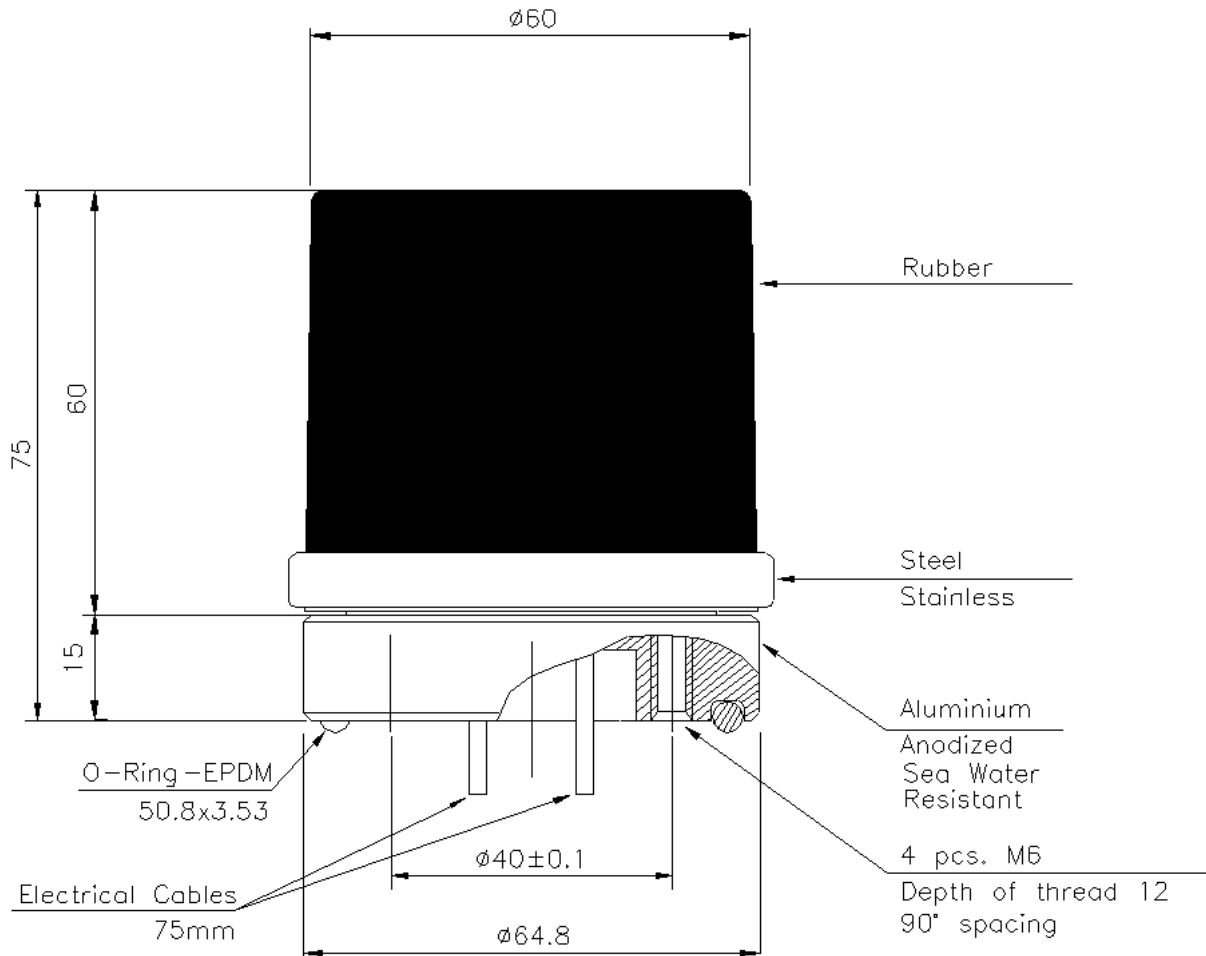

RESON reserves the right to change specifications without notice. © 2006 RESON A/S
For Acoustical Measurement Accuracy please refer to www.reson.com or contact sales.

RESON A/S
Denmark
Tel: +45 4738 0022
E-mail: reson@reson.dk

RESON Inc.
USA
Tel: +1 805 964-6260
E-mail: sales@reson.com

RESON Offshore Ltd.
United Kingdom
Tel: +44 1224 709 900
E-mail: sales@reson.co.uk

RESON GmbH
Germany
Tel: +49 431 720 7180
E-mail: reson@reson-gmbh.de

RESON B.V.
The Netherlands
Tel: +31 (0)10 245 1500
E-mail: info@reson.nl

RESON Mediterranean SRL
Italy
Tel: +39-051-572-643
E-mail: info@reson.it